

链轮 PLATEWHEEL

1"1/2 x 1"


24B-1-2-3, ~24A-1-2-3

链轮 PLATEWHEEL 1"1/2 x 1"

配对链条标准为DIN8187 ISO/R 606
For Chain Acc.to DIN8187 ISO/R 606

链轮 PLATEWHEEL	mm
齿侧倒角半径 Tooth Radius r ₃	38.0
齿侧倒角宽 Radius Width C	4.0
齿宽 Tooth Width B ₁	24.1
齿宽 Tooth Width b ₁	23.6
齿宽 Tooth Width B ₂	72.0
齿宽 Tooth Width B ₃	120.3

链条 CHAIN	mm
节距 Pitch	38.1
内节内宽 Internal Width	25.4
滚子直径 Roller Diameter	25.4

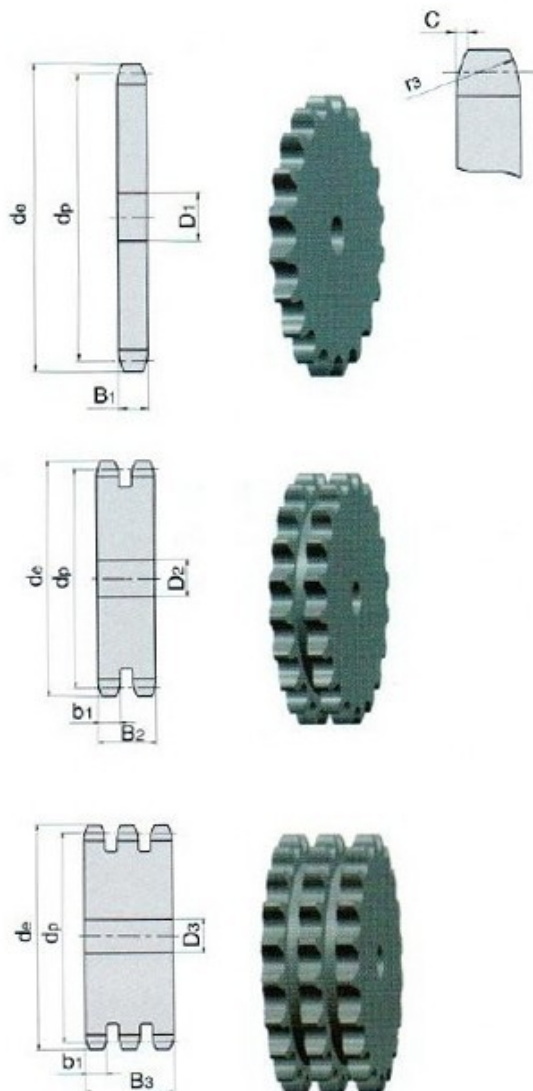

Z	de	dp	S		D		T	
			D1	D2	D2	D3		
8	115.0	99.55	20	25	25	25	25	
9	126.4	111.40	20	25	25	25	25	
10	138.0	123.29	20	25	25	25	25	
11	150.0	135.21	20	25	25	25	25	
12	162.0	147.22	20	25	25	25	25	
13	174.2	159.18	20	25	25	25	25	
14	186.2	171.22	20	25	25	25	25	
15	198.2	183.26	20	25	25	25	25	
16	210.3	195.30	25	25	25	25	25	
17	222.3	207.34	25	25	25	25	25	
18	234.3	219.42	25	25	25	25	25	
19	246.5	231.49	25	25	25	25	25	
20	258.6	243.57	25	25	25	25	25	
21	270.6	255.65	25	25	25	30	30	
22	282.7	267.73	25	25	25	30	30	
23	294.8	279.80	25	25	25	30	30	
24	306.8	291.88	25	25	25	30	30	
25	319.0	304.00	25	25	25	30	30	
26	331.0	316.08	30	30	30	30	30	
27	343.2	328.19	30	30	30	30	30	
28	355.2	340.27	30	30	30	30	30	
29	367.3	352.38	30	30	30	30	30	
30	379.5	364.50	30	30	30	40	40	
31	391.6	376.62	30	30	30	40	40	
32	403.7	388.69	30	30	30	40	40	
33	415.8	400.81	30	30	30	40	40	
34	427.8	412.93	30	30	30	40	40	
35	440.0	425.04	30	30	30	40	40	
36	452.0	437.16	30	30	30	40	40	
37	464.2	449.27	30	30	30	40	40	
38	476.2	461.39	30	30	30	40	40	
39	488.5	473.50	30	30	30	40	40	
40	500.6	485.62	30	30	30	40	40	
41	512.6	497.72	30	40	40	40	40	
42	524.7	509.83	30	40	40	40	40	
43	536.8	521.95	30	40	40	40	40	
44	549.0	534.07	30	40	40	40	40	
45	561.2	546.19	30	40	40	40	40	
46	573.3	558.30	30	40	40	40	40	
47	585.4	570.42	30	40	40	40	40	
48	597.4	582.54	30	40	40	40	40	
49	609.5	594.66	30	40	40	40	40	
50	621.7	606.78	30	40	40	40	40	
51	633.8	618.90	30	40	40	40	40	
52	646.0	631.01	30	40	40	40	40	
53	658.0	643.13	30	40	40	40	40	
54	670.2	655.28	30	40	40	40	40	
55	682.3	667.40	30	40	40	40	40	
56	694.4	679.51	30	40	40	40	40	
57	706.5	691.63	30	40	40	40	40	
58	718.6	703.74	30	40	40	40	40	
59	730.7	715.86	30	40	40	40	40	
60	742.8	727.97	30	40	40	40	40	
62	767.2	752.24	40	40	40	40	40	
64	791.3	776.48	40	40	40	40	40	
65	803.4	788.59	40	40	40	40	40	
66	815.6	800.71	40	40	40	40	40	
68	839.8	824.98	40	40	40	40	40	
70	864.2	849.21	40	40	40	40	40	
72	888.4	873.48	40	40	40	40	40	
75	924.8	909.83	40	40	40	40	40	
76	936.9	921.98	40	40	40	40	40	
80	985.4	970.44	40	40	40	40	40	
85	1046.0	1031.10	40	40	40	40	40	
90	1167.3	1152.33	40	40	40	40	40	